


DEADBOLT DOUBLE CYLINDER

TEMPLATE: W53518, REV. 2 11-22-2010

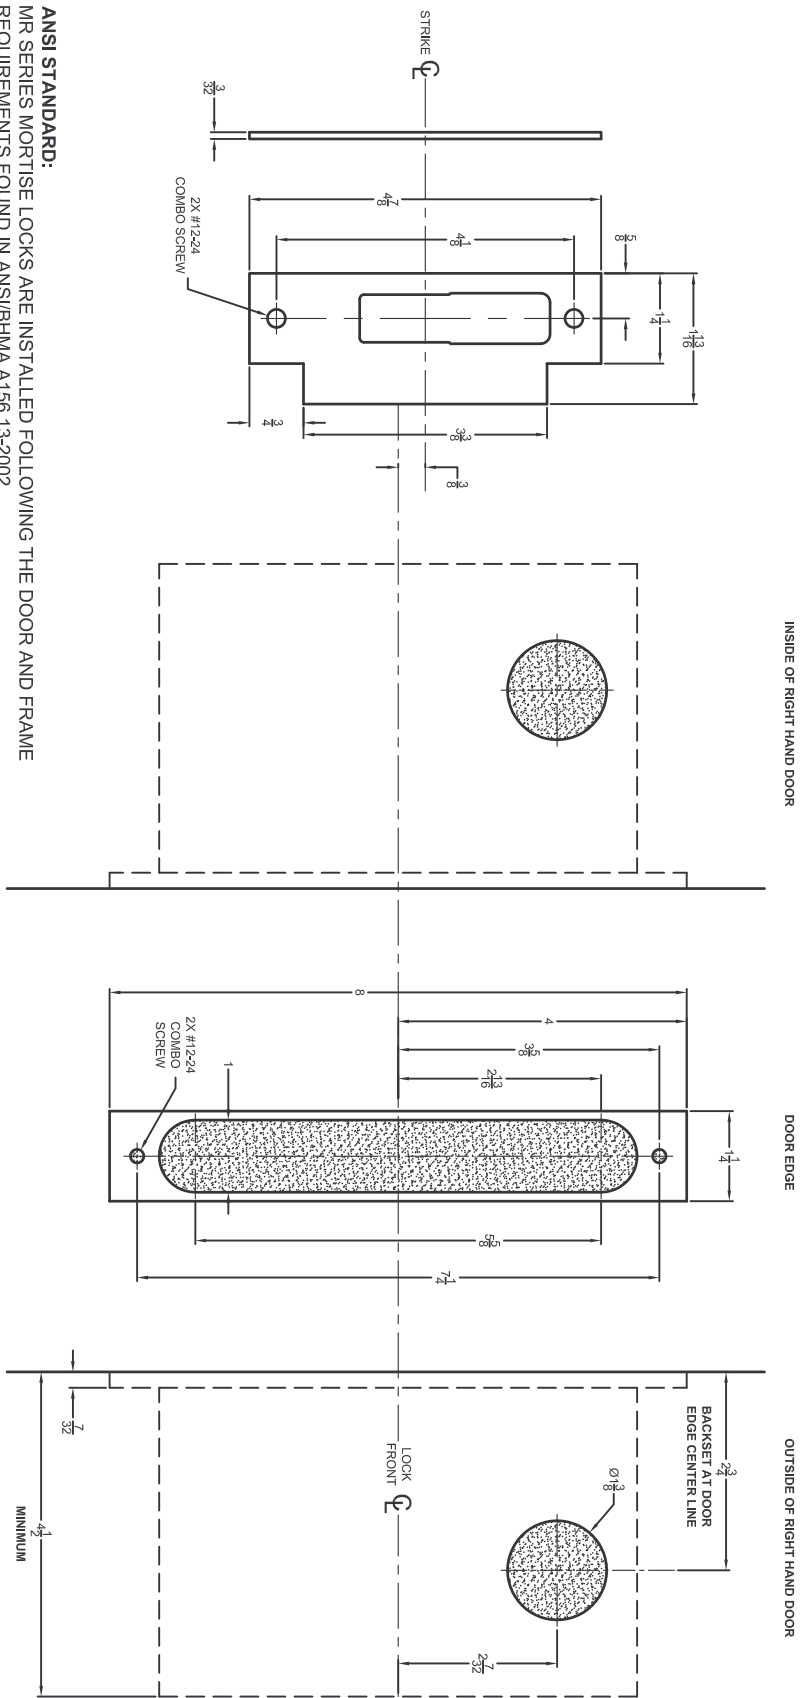

ANSI STANDARD:
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.

DOORS:
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

DOOR THICKNESS:
STANDARD DOOR THICKNESS IS 1-3/4". CONSULT FACTORY FOR OTHER DOOR SIZES.

LEAD LINING:
ADD 1/8" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

SILENCERS AND WEATHER STRIPPING:
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.

NOT TO SCALE



2754 CREEK HILL ROAD
LEOLA, PA 17540
PHONE: (800) 441-9692
FAX: (717) 656-6892

MR133 MR134

JOB: _____

DATE: _____

COMMENTS: _____